

TECHNICAL DATA SHEET

DAB12-70JEV




General Features

- High Corrosion Resistant Performance: Pb-Ca multi-alloy grid
- High Energy Density and Power Density
- Excellent Charge Acceptance Ability
- Strong High and Low Temperature Performance
- Optimized Capability of instant High-current Discharging
- Low self-discharge rate



Dimension: 350(L)×166(W)×175(H)×175(TH) Unit: mm

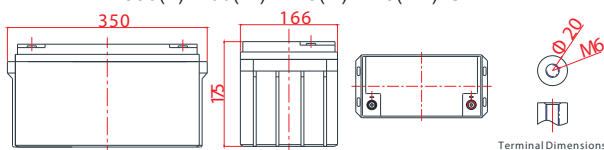

Applications

- Electric vehicle
- Electric wheelchair
- Electric scooter
- Electric play car for children
- Garbage truck
- Patrol car

Specification

Nominal Voltage	12V
Nominal Capacity	65Ah
Design life	10 years
Terminal	M6
Approx. Weight	Approx 21.0kg (46.3lbs)
Container Material	ABS
Rated Capacity	70.0 Ah 20Hour Rate (3.50 A to 10.5V)
	65.7 Ah 10Hour Rate (6.57A to 10.5V)
	59.0 Ah 5Hour Rate (11.8 A to 10.5V)
Internal resistance	Full charged at 25°C: 7.5 mΩ
Max. Discharge Current	780A(5S)
Operating Temperature	Discharge: -20 ~50°C (-4 ~ 122°F)
	Charge: -20 ~50°C (-4 ~ 122°F)
	Storage: -20 ~50°C (-4 ~ 122°F)
Charge current: Max. 13.0 A	
Charge Method (25 °C)	Float Charge: 13.5-13.8V,recom.13.8V(-18mV/ °C)
	Cycle charge:14.28-14.4 V,recom.14.4V(-30mV/ °C)
Self discharge	3% of capacity declined per month at 25°C

TECHNICAL DATA SHEET

DAB12-70JEV

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

FV/Time	5min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	229	123	74.8	43.8	25.1	18.2	12.2	8.03	6.76	3.55
1.65V	222	119	73.6	43.5	25.0	18.0	12.1	7.96	6.70	3.53
1.70V	213	117	72.3	43.2	24.8	17.8	12.0	7.90	6.63	3.51
1.75V	196	113	71.7	42.6	24.4	17.6	11.8	7.83	6.57	3.50
1.80V	176	105	68.5	41.5	24.0	17.5	11.5	7.77	6.50	3.48
1.85V	157	93.9	62.6	38.4	22.7	16.4	11.0	7.45	6.31	3.42

Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)

FV/Time	5min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	384	217	135	82.7	47.5	34.7	23.2	15.6	13.0	7.02
1.65V	369	213	134	82.1	47.3	34.2	23.1	15.5	12.9	6.99
1.70V	367	210	134	81.5	47.1	34.0	22.9	15.4	12.7	6.96
1.75V	343	209	134	80.8	46.9	33.8	22.7	15.3	12.6	6.92
1.80V	315	198	130	80.2	46.8	33.7	22.5	15.2	12.5	6.89
1.85V	281	177	120	74.5	44.7	32.0	21.5	14.6	12.3	6.83

Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.

Charger recommendations


Type of charger	Zivan	AQHF WP	AQHF24-30FC G2
Matching profile	AGM =BA1+CU2	AMG SLA	AGM

Max. charging current 2.4Vpc


TECHNICAL DATA SHEET

DAB12-70JEV


Discharge characteristic

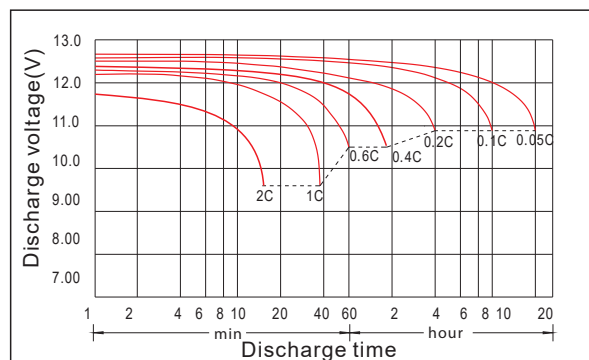


Charging characteristic

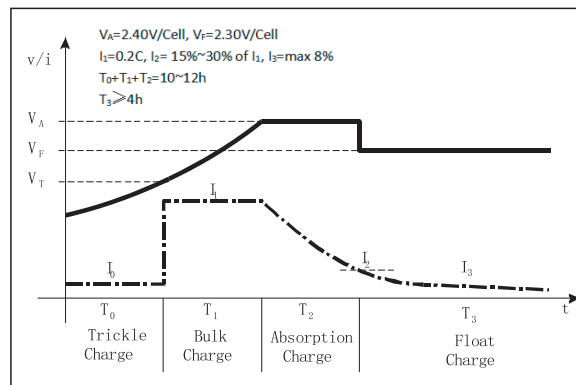


The effect of temperature on capacity

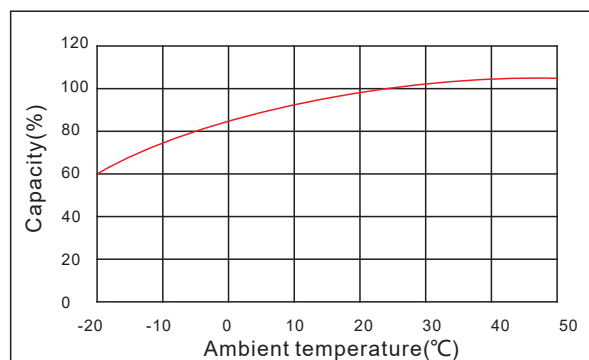

The effect of discharge depth on cycle life

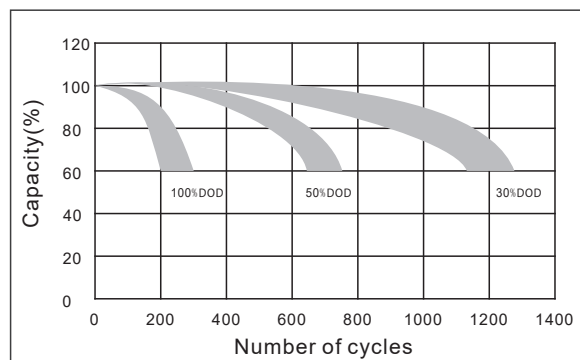

Curves of self-discharge

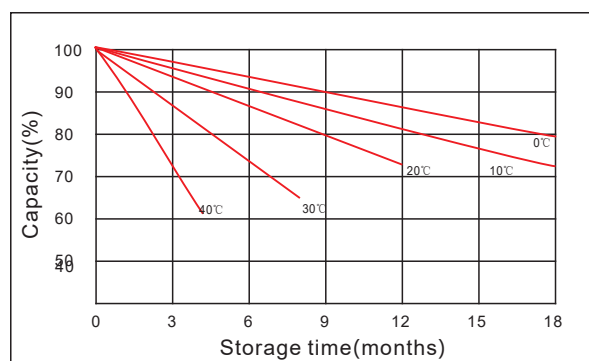

The effect of temperature on float life

