


# 8G8VGC

## SPECIFICATIONS

Nominal Voltage (V)	8 V
Capacity at C/100	160 Ah
Capacity at C/20	140 Ah
Capacity at C/5	114 Ah
Weight	70 lbs. (32 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)
Charge Voltage @ 77°F (25°C)	
Cycle Float	9.20 - 9.60 V 8.96 - 9.04 V
Valve	Low pressure, self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	U (Combination Molded)



Rated UN2794, wet filled with acid

Made in the U.S.A. by East Penn Manufacturing Co.

Distributed by:

## Valve-Regulated, Gelled-Electrolyte Battery




## DIMENSIONS

*Inches (mm)*

Length	10.31 (262 mm)
Width	7.15 (182 mm)
Height	10.89 (277 mm)

**Gel Cycle Life vs Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity**

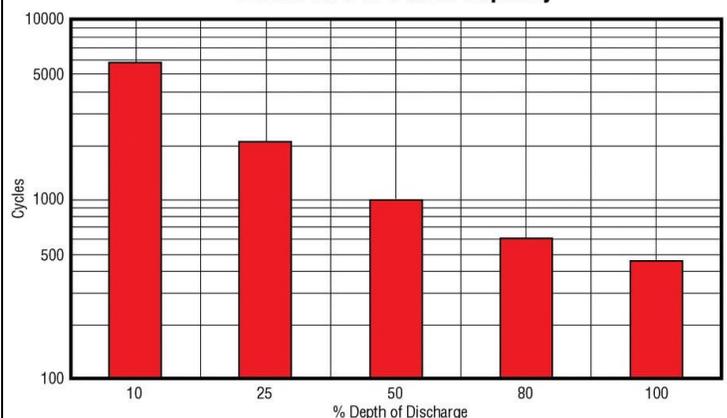

**MK Battery**

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

