


9-STEP HIGH FREQUENCY BATTERY CHARGER 12/24V

WET MF EFB AGM GEL

Type: **Topcore 15A**
Barcode: 8436594880858

This is a **smart battery charger with dual voltage and dual current** for large size applications. After connection, charge is performed automatically until completion, then the **maintenance** mode initiates and keeps the battery in a full state of charge until disconnection, without any wearing. To operate safely, ensure you respect all safety instructions and personal precautions described in the product manual.

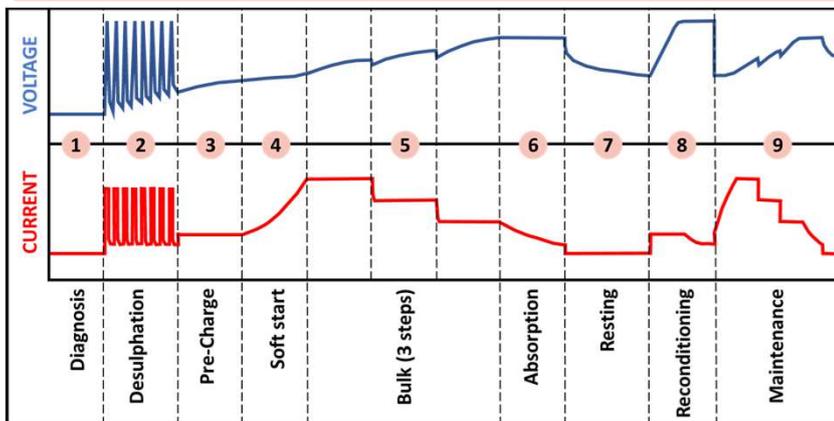

Functions:

- Diagnosis
- Deep discharge recovery
- Cold weather mode
- Maintenance charge

Safety protections:

- Reverse polarity/short circuit
- Overheating

Box content:

- Charger with cables (AC mains plug and battery clamps)
- User manual

Other Topcore chargers:

- Topcore 1A-12V
- Topcore 4A-6/12V
- Topcore 8A-6/12V
- Topcore 30A-12/24V



Technical Specifications	
Input:	220-240V, 50-60Hz, 3,2A
Output:	12V-8/15A or 24V-8/15A
Technologies:	Lead-acid batteries: WET, MF, EFB, AGM & GEL
Applications:	12V-8A mode: 12V batteries within 80-240Ah 12V-15A mode: 12V batteries within 150-450Ah 24V-8A mode: 24V series within 80-240Ah 24V-15A mode: 24V series within 150-450Ah