DT SERIES FLOODED BATTERY

DT146 (6V260Ah)




CHARACTERISTICS

| Item | | Specifications |
|--------------------|------------------|----------------------|
| Voltage | | 6V |
| Dimension | Length | 260mm (10.2inches) |
| | Width | 180mm (7.09inches) |
| | Container Height | 248mm (9.76inches) |
| | Total Height | 279.5mm (11.0inches) |
| Approx Weight | | 30.4kg (67.0lbs) |
| Terminal | | 8V240 |
| Container Material | | PP |
| Rated Capacity | 20HR | 260Ah |
| | 5HR | 215Ah |
| Reserve Capacity | 25A | 530min |
| | 75A | 145min |

GENERAL FEATURES

- Long cycle service life, strong recovery ability of deep discharge
- Low risk of thermal runaway, easy maintenance
- High energy, low internal resistance, low self-discharge
- Reliable sealing structure ensures no leakage during use
- · Special design and structure increase battery performance
- The special alloy improves the corrosion resistance of the plate increases the service life and good deep discharge performance

10.5 30±2



APPLICATIONS

· Electric vehicle


· Cleaning equipment

Golf cart

• AWP


· Sightseeing bus

Marine&RV

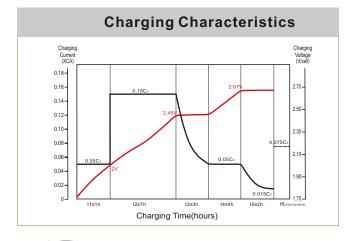

Designed in compliance with applicable BCI standard.

Tested in compliance to BCI standard.

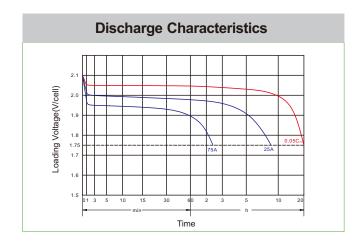

Leoch International Technology Ltd.

www.leoch.com

Leoch Batteries Pte Ltd

www.leoch.sg

Leoch Battery Corporation

www.leoch.us

Leoch Europe S.A.

www.leoch.eu