


Range: **INDUSTRIAL**

Type name: **CB220.4**

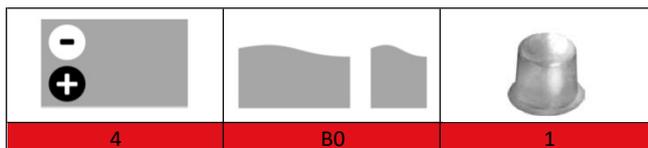

PERFORMANCES*		CONFIGURATION	
Voltage:	12 V	Size:	514x276x242 mm (C)
Capacity:	220 Ah (20h)	Polarity:	4
C. Cranking (EN):	1250 A	Terminal:	1 (taper)
Vibration (EN):	V2	Holddown:	B0
Duration (EN):	E1	Ventilation:	Individual plugs
Self-Discharge:	12 months	Maintenance:	Very Low maintenance
(from the date of production, at 25°C)			

*According to standard EN 50342

INTERNAL CONSTRUCTION		COMPONENTS	
Tecnology:	Punched, with regular surface	Box/Recipiente:	PP/black
Alloy:	Calcium	Lid:	Flat, PP/black
Separator:	PE envelope	Plugs:	Screw, PP/black
Total Weight:	54,6 kg	Handles:	On container, rope/black
Acid:	Inside the battery		
Origin:	Europe		

RECOMMENDATIONS	
Storage:	Check voltage every 6 months. Avoid exposure to sub-zero temperatures.
Recharge:	Use automatic chargers with constant voltage.
Installation:	Not applicable when batteries are located at the end of chassis.